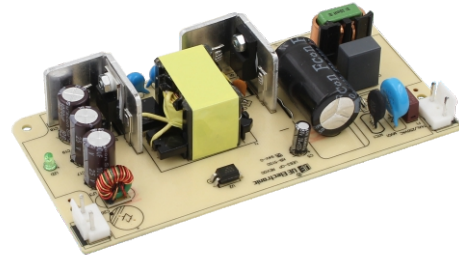



**Product Features**

- Medical & ITE safety meet
- 2 MOPP input to output isolation
- DOE Efficiency Level V
- Leakage current < 100µA
- ≤ 0.3W standby power
- Up to 5,000m operating altitude
- The peak load can reach 7A and last for more than 1s


**Models & Ratings**

Model Number	Voltage	Current	Rated Power	Ripple & Noise (max)(*1)	Voltage Tolerance	Line & Load Regulation	Efficiency (typ.)	Start Up Delay
UE63-XXXYYYSPA-OP	18.0	0.01-3.50	63W	240mVpk-pk	±5%	Line: ±1% Load: ±5%	87.0%	≤3s

**Mechanical Details**

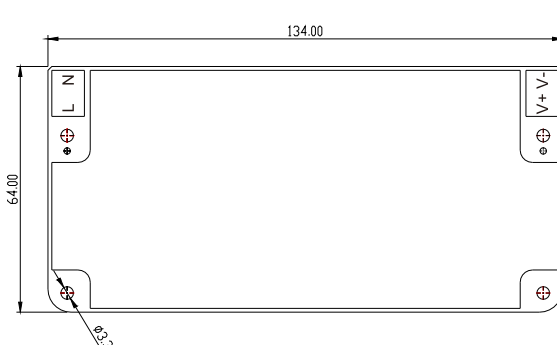


**AC Input Connector :**  
JST B3P-VH or equivalent

Pin No.	1	2	3
Assignment	AC/L	No Pin	AC/N

**DC Output Connector :**  
JST B3P-VH or equivalent

Pin No.	1	2	3
Assignment	v+	No Pin	v-



Unit: mm

**Notes**

(\*1) Measured at output connector with 20MHz bandwidth and 0.1µF ceramic in parallel with 10µF electrolytic capacitors.

**Input**

Input Voltage Range	90-264VAC
Frequency Range	47-63Hz
Input Current	1.5A at 90VAC
Inrush Current	100A max at 240VAC cold start
Touch Leakage Current <sup>(max)</sup>	< 100µA at 264VAC

**Environmental**

Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 70°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

**General**

Dimensions	134(L) 64(W) 32(H)mm
Weight	125g
MTBF	>100,000hrs MIL-HK8K-217 at 25°C
Isolation	5,656VDC Input to Output

**Protection**

Overload	120-200% rated output power, auto recovery
Over Voltage	120-150% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

**Safety Approvals**

Safety Agency / Mark	Medical	ITE(Meet)
CB	IEC60601-1	IEC62368-1

**EMC**

Emissions	Medical	ITE
Conducted	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Radiated	IEC/EN 60601-1-2, CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN 60601-1-2	EN55035, CISPR 35
ESD	EN61000-4-2	±15KV air, ±8KV contact
Radiated Immunity	EN61000-4-3	10V/m, 3V/m 80MHz - 2.7GMHz
EFT/Burst	EN61000-4-4	±2KV on AC port, ±1KV on signal ports
Surge	EN61000-4-5	±2KV line to line (diff mode)
Conducted Immunity	EN61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	EN61000-4-8	30 A/m
Dips & Interruptions	EN61000-4-11	0%, 70%, 0% of UT

**Others**

Dielectric Withstand Voltage	5,656VDC input to output
Insulation Resistance	10M Ohms, 500VDC input to output