

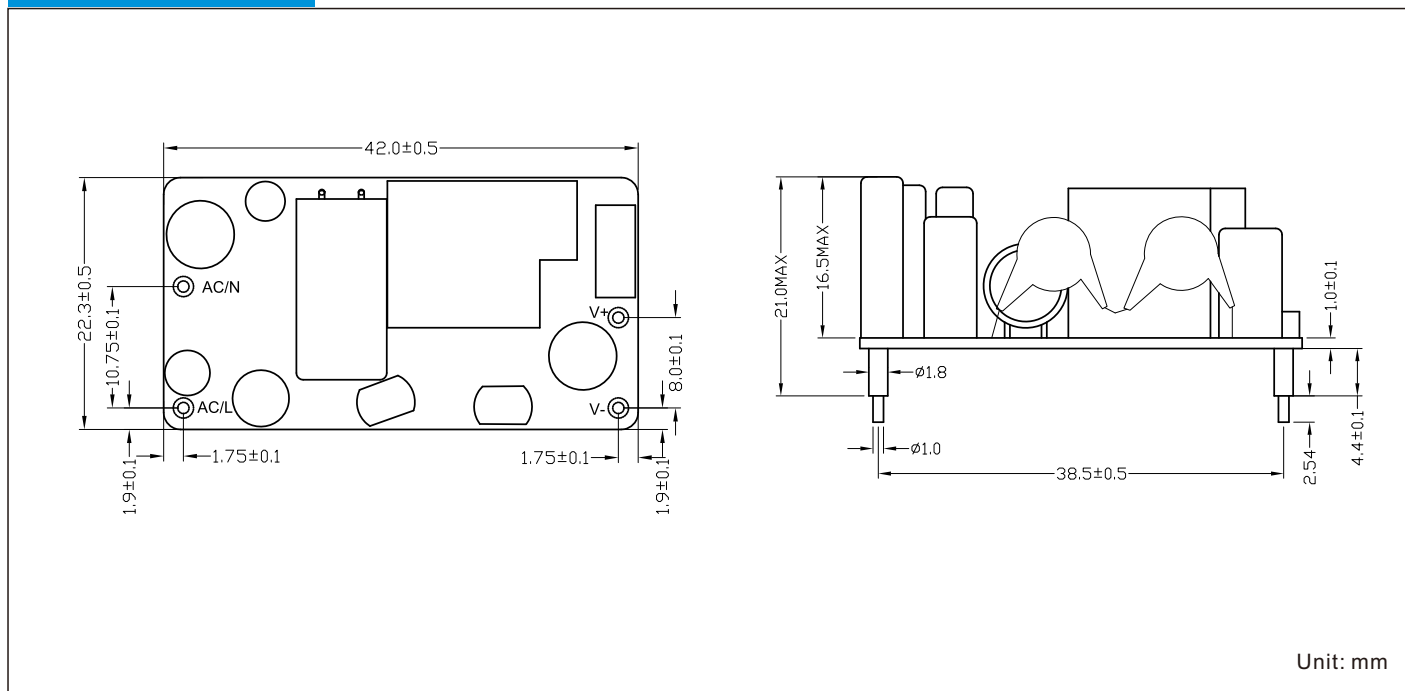
Class II

Product Features

- Medical safety approvals
- 2 MOPP input to output isolation
- No load power consumption <math>< 0.075W</math>
- Leakage current $\leq 100\mu A$
- Up to 5,000m operating altitude


Models & Ratings

Model Number	Voltage ^(*1)	Current	Rated Power	Ripple & Noise (max)(*2)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES10-120085SPA-OP	12.0V	0.01-0.85A	10.00W	150mV	$\pm 2.5\%$	Line: $\pm 2.5\%$ Load: $\pm 2.5\%$	80.00%	$\leq 3s$

Mechanical Details


Unit: mm

Notes

(*1) Other options are available, please contact our sales representative for details.

(*2) Measured at output connector with 20MHz bandwidth and 0.1uF ceramic in parallel with 10uF electrolytic capacitors.